

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088368 A1

(51) International Patent Classification⁷: G02B 5/30, (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/JP2004/004188

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-091770 28 March 2003 (28.03.2003) JP
2003-341323 30 September 2003 (30.09.2003) JP

(71) Applicant (for all designated States except US): FUJI PHOTO FILM CO., LTD. [JP/JP]; 210, Nakanuma, Minami-Ashigara-shi, Kanagawa 250-0123 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NAKAMURA, Kazuhiro [JP/JP]; c/o Fuji Photo Film Co., LTD., 210, Nakanuma, Minami-Ashigara-Shi, Kanagawa 250-0123 (JP).

(74) Agents: OGURI, Shohei et al.; Eikoh Patent Office, 13th Floor, ARK Mori Building, 12-32, Akasaka 1-chome, Minato-Ku, Tokyo 107-6013 (JP).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POLARIZING PLATE AND MANUFACTURING METHOD THEREOF, AND IMAGE DISPLAY DEVICE

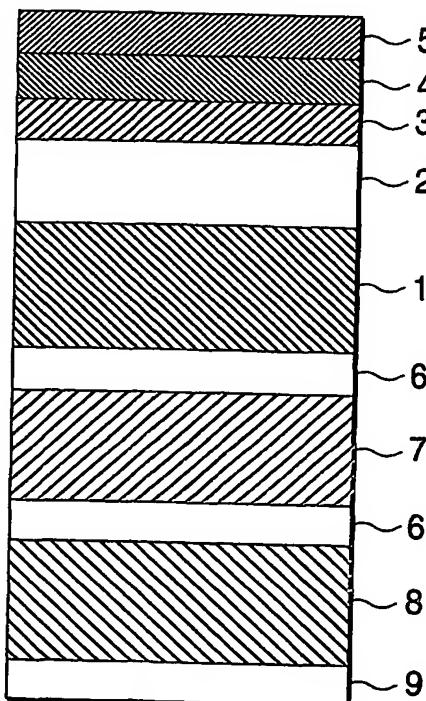

(57) Abstract: A method for manufacturing a polarizing plate comprising : bonding an antireflection film containing a transparent support and an antireflection structure including a plurality of layers different in refractive index each comprising a cured film to a polarizing film, wherein at least one layer of the plurality of layers different in refractive index is a layer having a higher refractive index than that of the transparent support and a thickness of 10 nm to 2 μ m, and the antireflection film is bonded to the polarizing film after being subjected to a hydrophilization treatment so that a contact angle to water of a surface of the antireflection film to be bonded to the polarizing film falls within a range of 20 degrees to 50 degrees.